


TST / TSTW

Din Rail

Support Brackets

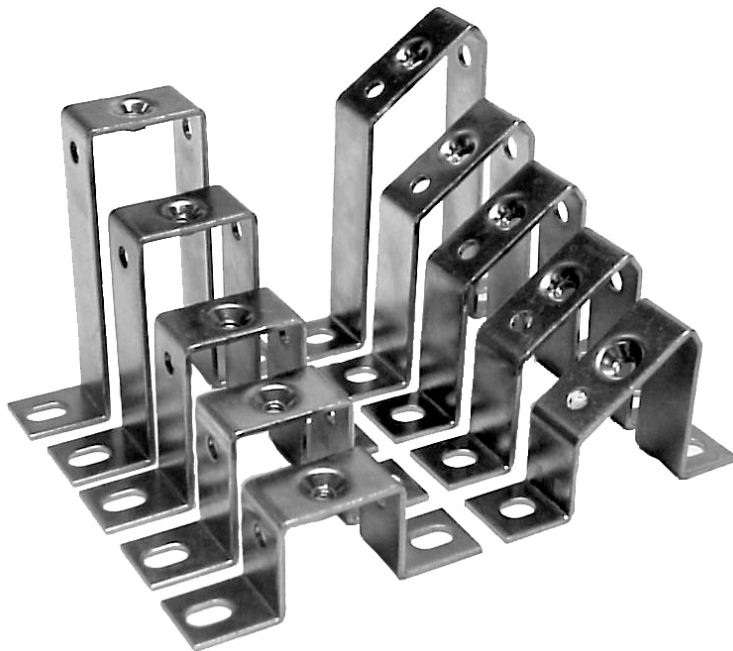

- TST brackets raise DIN rail off the surface they are mounted on while the TSTW raise and angle the rail to 35 degrees.
- Drilled and tapped for an M6 screw to secure the rail to the bracket.
- Steel with a zinc dichromate plating.

#### United States

Weidmuller Inc.  
821 Southlake Blvd.  
Richmond, Virginia 23236  
Telephone: (800) 849-9343  
Facsimile: (804) 379-2593  
Email: [info@weidmuller.com](mailto:info@weidmuller.com)  
Website: [www.weidmuller.com](http://www.weidmuller.com)

#### Canada


Weidmuller Ltd.  
10 Spy Court  
Markham, Ontario L3R 5H6  
Telephone: (800) 268-4080  
Facsimile: (905) 475-2798  
Email: [info1@weidmuller.ca](mailto:info1@weidmuller.ca)  
Website: [www.weidmullerca](http://www.weidmullerca)

#### Weidmuller, S.A. de C.V

5 Sur No. 4311  
Col. Huexotitla  
72534 Puebla, Pue. Mexico  
Telephone: (22) 37 2549  
Facsimile: (22) 43 1981  
Email: [weidmull@acnet.net](mailto:weidmull@acnet.net)

# TST / TSTW


## TST

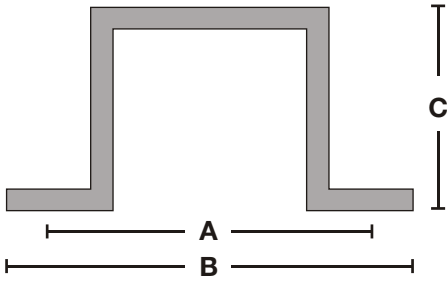

A	B	C
64	80	90
64	80	70
64	80	50
64	80	40
64	80	30

A: mounting holes centre-to-centre spacing, dimensions = 12mm x 7mm  
 Width: 20mm  
 Thickness: 2mm

## TSTW - 35° angle

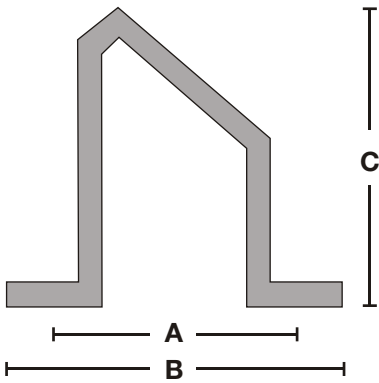

A	B	C
60	80	98
60	80	88
60	80	78
60	80	68
60	80	58
60	80	49

A: mounting holes centre-to-centre spacing, dimensions = 10mm x 7mm  
 Width: 20mm  
 Thickness: 2mm

### Ordering Data

TST / TSTW

792427

Height in mm (dimension C)

Angle (00 or 35)

e.g. 792427 35 80 for 35° angle, 80mm height

FKSC M6 screw, Allen key SW3 8mm  
 12mm

064260  
 035350