



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn98%, Cu2%	Yes	Yes

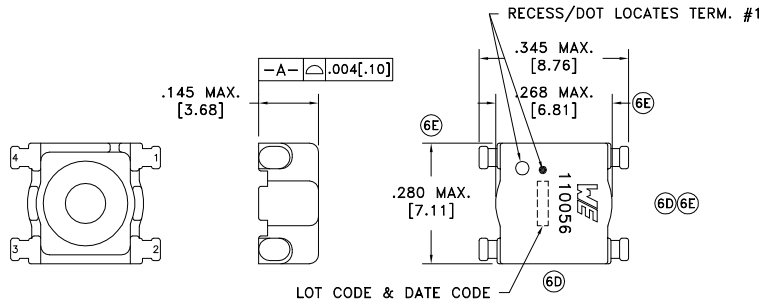

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
⑥E D.C. RESISTANCE 1-2	@20°C	0.35 ohms max.
⑥E D.C. RESISTANCE 4-3	@20°C	0.36 ohms max.
⑥E⑥C INDUCTANCE 1-2	10kHz, 100mVAC, Ls	70uH min.
⑥E⑥C INDUCTANCE 4-3	10kHz, 100mVAC, Ls	80uH min.
⑥E⑥B DIELECTRIC 1-4	5000VDC, 1 second	-
⑥E⑥B TURNS RATIO	(6-4):(1-3)	1.08:1, ±1%

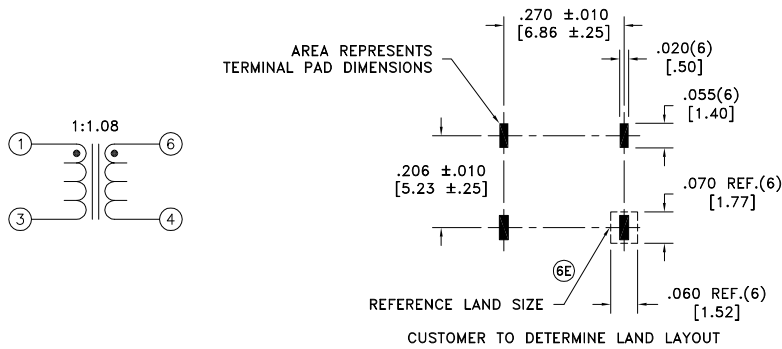

⑥B GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -20°C to +85°C.

STORAGE TEMPERATURE RANGE: -40°C to +105°C.

COPLANARITY: All 6 terminals must lie on a plane within .004 [.10] of Surface A after lead tinning.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64	DRAWING TITLE TRANSFORMER	PART NO. 750110056
6E	8/18	Method: Tape & Reel		Decimals: ±.005 [.13]		
6D	10/15	PKG-0548		Footprint: ±.005 [.13]		
6C	2/11	www.we-online.com/midcom				
6B	10/10	SEE REVISION SHEET FOR REVISION LEVEL				
				This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750110056	
						SPECIFICATION SHEET 1 OF 1