



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

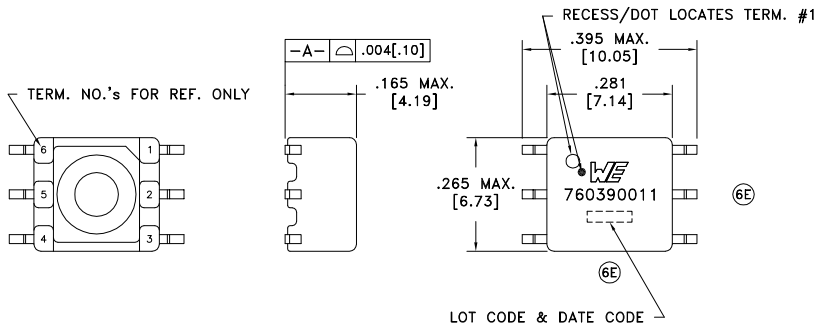

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
6B D.C. RESISTANCE	1-3 @20°C	0.46 ohms max.
6B D.C. RESISTANCE	6-4 @20°C	0.48 ohms max.
INDUCTANCE	1-3 10kHz, 100mVAC, Ls	1.0mH min.
DIELECTRIC	1-6 1875VAC, 1 second	1500VAC, 1 minute
TURNS RATIO	(6-4):(1-3)	1.1:1, ±2%

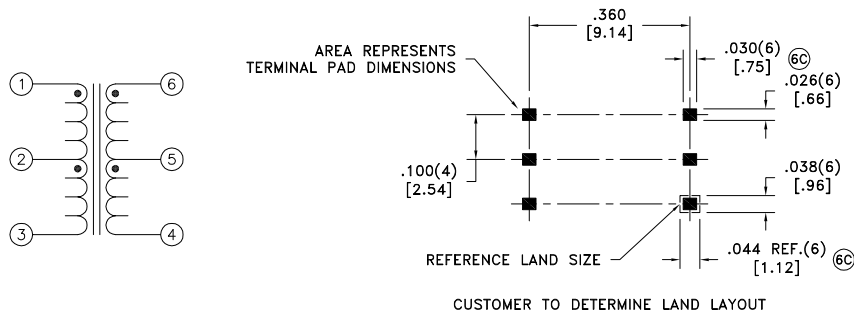

GENERAL SPECIFICATIONS:

6B OPERATING TEMPERATURE RANGE: -40°C to +125°C.

CURRENT RATING: 100mAAC

VOLTAGE-TIME: 7VuS

6D Qualified to AEC-Q200.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 760390011
6E	7/16	Method: Tape & Reel				
6D	3/16	PKG-0895				
6C	6/13	www.we-online.com/midcom				
6B	1/13	SEE REVISION SHEET FOR REVISION LEVEL				SPECIFICATION SHEET 1 OF 1