


- 注) NOTES
- 材質 MATERIAL
ハウジング: ガラス入りポリエステル UL94V-0
HSG.: POLYESTER G.F.15% UL94V-0
ターミナル: リン青銅
TERM.: PHOSPHOR BRONZE
 - メッキ仕様 PLATING
接点部: 金メッキ、表参照
CONTACT AREA: GOLD PER TABLE
半田付け部: 錫メッキ 1.0µmMIN.
SOLDER AREA: TIN 1.0 MICROMETER MINIMUM.
下地メッキ: ニッケルメッキ 1.0µmMIN.
UNDERPLATE: NICKEL 1.0 MICROMETER MINIMUM.
 - △ 64*6は両端の基板穴を除く。
62*6は両端の2つの基板穴を除く。
DIM B INDICATES FIRST P.C.HOLE REQUIRED PER PART NUMBER. FOR PARTIALLY LOADED ASSEMBLIES P.C.HOLE PATTERN IS REDUCED FROM EACH END.
 - 推奨基板厚: t=1.6±0.05
RECOMMENDED P.C.B. THICKNESS: 1.6±0.05
 - △ 金メッキ厚標示
COLOR CODING TO INDICATE GOLD PLATING
黄色: 0.1µmMIN. YELLOW: 0.1 MICROMETER MINIMUM.
緑色: 0.38µmMIN. GREEN: 0.38 MICROMETER MINIMUM.
オレンジ色: 0.76µmMIN. ORANGE: 0.76 MICROMETER MINIMUM.
無色: 1.27µmMIN. UNMARKED: 1.27 MICROMETER MINIMUM.
 - ハウジングの色は、グレイ。
HOUSING COLOR IS GRAY.
 - 本製品は52018-6**5の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52018-6**5.

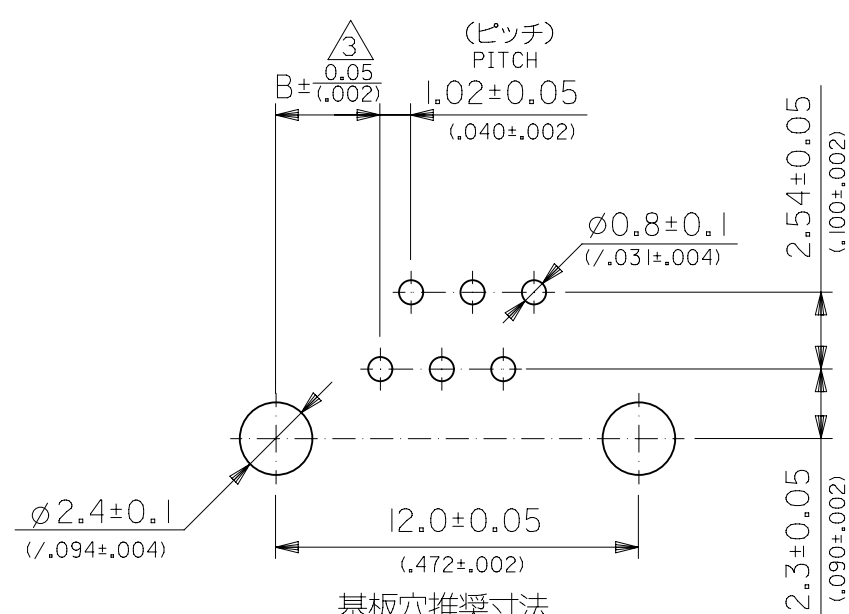

基板穴推奨寸法
RECOMMENDED P.C.B. LAYOUT
(ジャック取付け側)
(JACK ASS'Y SIDE)

MATERIAL 材料	注参照 SEE NOTES
FINISH 仕上げ	注及び表参照 SEE NOTES AND CHART
WIRE RANGE 適用電線範囲	— # —
INS. RANGE 被覆外径	— # —

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差		±0.2	
10 UNDER 未満			
10 OVER 以上	30 UNDER 未満		±0.25
30 OVER 以上			±0.3
ANGLE 角度		±3°	

6	6	5.08 (.200)	3.46 (.136)	1.27 / (50)	52018-6646
POSITION	極数 CIRCUITS	A	B	金メッキ厚 µm/(µMIN) GOLD PLATING THK(MIN.) µm/(µMIN)	製品番号 MATERIAL No.
MODEL NO.		52018-6**6			

PENDING APPROVAL

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
DIMENSION UNITS MM		SCALE 4:1		CURRENT REV DESC:	
GENERAL TOLERANCES (UNLESS SPECIFIED)		MM		INCH	
4 PLACES	±	±	±	EC NO: 628958	
3 PLACES	±	±	±	DRWN: AKUMAR19 2018/08/22	
2 PLACES	±	±	±	CHK'D:	
1 PLACE	±	±	±	APPR:	
0 PLACES	±	±	±	INITIAL REVISION:	
ANGULAR TOL ± °		THIRD ANGLE PROJECTION		DRAWING	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		B-SIZE		SERIES 52018	
DOCUMENT NUMBER SD-52018-003		DOC TYPE PSD		DOC PART 001	
MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL MARKET		REVISION A	
SHEET NUMBER 1 OF 1					

DOCUMENT STATUS	RQ	RELEASE DATE
-----------------	----	--------------