




REV.	EQN. NO.	DATE	SIGN.	DESCRIPTION
B	LEN-910123~126	2009/01/08	Vicky	Update the drawing.
C	LEN-0A0050~53	2010/09/03	Zhang Xing	Change Dimension.

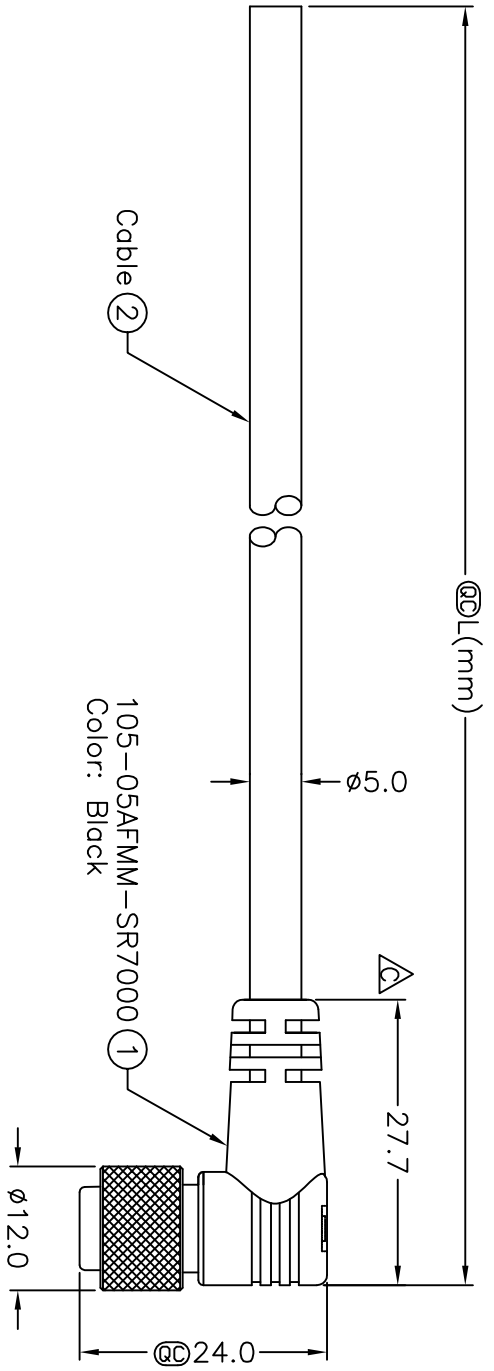


105-05AFMM-SR7AXX

- XX:01~99Meters
- 01:01Meter
- 02:02Meters
- ...
- 99:99Meters

Cable Length(L):01~99Meters

- Notes:
- * @ Important Dimension.
 - * Waterproof Rate:IP67.
 - * Connector:Nylon+GF,Black.
 - * Male Pin:Copper Alloy,Gold Plated.
 - * Cable:UL2464 24AWG*5C+Talc,Black, PVC Jacket,UV Resistant,OD=5.0mm.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin	Wire Color	Pin Out
5	Yellow	黃
4	Orange	橘
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	

Pin Assignments
Front View

UNIT:mm		TITLE	M10.5 Conn
TOLERANCE	±0.5 mm	SCALE	Cable Screw 5P F Conn M Pin
REV.	C	SIZE	A4
		SHEET	1 OF 1
		Inspection Item	@

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DATE
	105-05AFMM-SR7AXX	ALTW	2010/09/03
DRAWN BY	CHECKED BY	APPROVED BY	DATE
Zhang Xing	Ting	Can	2010/09/03