

M2 DIN rail mounted electronic timers (22.5 mm)

Relay outputs

- Multi-function or mono-function
- Multi-range (8 ranges)
- Dual-voltage
- 1 changeover 8 A / 250 V
- Display of output states by 2 LEDs
- Wide choice of functions
- Front terminals

Characteristics

Accuracy	
Repetition accuracy (with constant parameters)	± 0.5 %
Variation according to 0 • 40 °C	± 3 %
VDE 0435 -20 • 60 °C	± 5 %
Min. control pulse	0.02 s
Maximum reset time by de-energisation	0.100 s
Immunity from micro power cuts	<0.02 s
Output specification	
Nominal current	8 A ~ 1 A ~
Nominal voltage	250 V ~
Rated power	2000 VA - 30 W
Maximum admissible current	15 A < 0.01 s
Minimum current	50 mA ~
Electrical life at I max 250 V ~ resistive (cycles)	1.5 • 10 ⁵
Max. permitted number of operations per hour at I max 250 V ~ resistive	360
Mechanical life (operations)	2 x 10 ⁷
Function and use	
Display of output state by LED	output in operation power on
	Green LED Red LED
Voltage variation	± 15 % Un 127 V-10% 240 V+10%
Maximum absorbed power	1.5 W / 24 V 5 VA / 110-127 V 10 VA / 220-240 V
Temperature limits	Use Stored
	-20 °C + 60 °C -30 °C + 70 °C
Insulation according to standard VDE 0110 - IEC 255 Group C	250 V ~
Protection class according to NFC 20010 - IEC 529 - DIN 40050	IP40
Conformity to standards IEC 255 VDE 0435-2021	•
Protection from voltage surge (in joules)	2
Connection: by terminal blocks with cable guide and front-access captive screws	•
Terminal capacity : multi or single wire 1 or 2 leads	2.5 mm ²
Mounting on symmetrical DIN rail 35 mm EN 50022	•
Weight (g)	110

Products currently being replaced by the TR range

Timing

Types

Part numbers (and voltages)

24 V ~ / 110 • 127 V 50 • 60Hz
24 V ~ / 220 • 240 V 50 • 60Hz
24 V ~ / 50 • 60Hz
110 • 127 V 50 • 60Hz
220 • 240 V 50 • 60Hz
N.B. : For 48 V ~ supply
Additional resistor : 560 Ω 2W / 24 V ~

Functions

Relay outputs
Nominal current

Timing ranges (8 available options)

0.1 s to 1 s	0.4 min to 4 min	1 h to 10 h
1 s to 10 s	1 min to 10 min	6 h to 60 h
6 s to 60 s	6 min to 60 min	

Function diagrams

Terminal connections

- A1 - A2 : Supply
- A3 : Bridge (A2 - A3) for 24V supply
- B1 - B2 : Control contact
- 15 - 16 - 18 : Timed output contact
- Galvanic insulation Input-Output





Accessories

Panel adaptor

79 237 806

Function diagrams

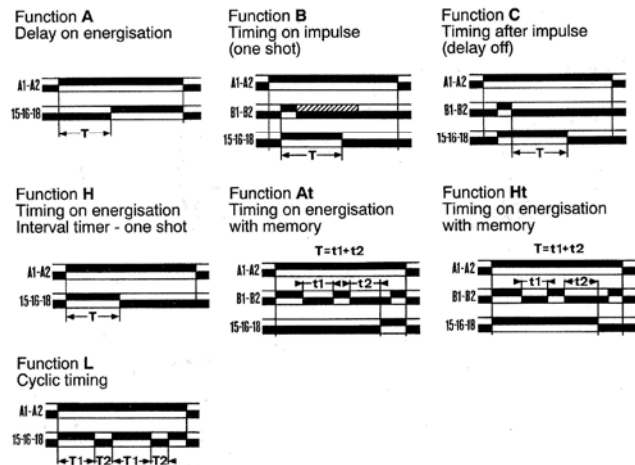

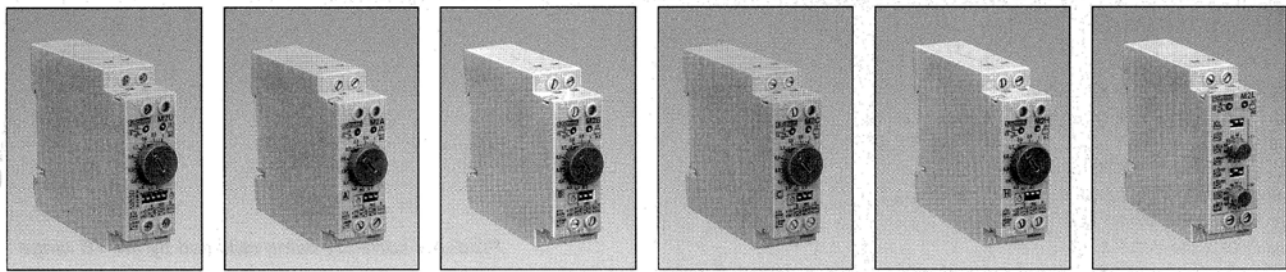



0.1 s • 60 h 0.1 s • 60 h 0.1 s • 60 h 0.1 s • 60 h 0.1 s • 60 h 0.1 s • 60 h

M2 U **M2 A** **M2 B** **M2 C** **M2 H** **M2 L**

1
2





88 881 005	—	—	—	—	88 881 505
88 881 006	—	—	—	—	88 881 506
—	88 881 100	88 881 200	88 881 300	88 881 400	—
—	88 881 102	88 881 202	88 881 302	88 881 402	—
—	88 881 104	88 881 204	88 881 304	88 881 404	—

Multi-function with selection	Mono-function	Mono-function	Mono-function	Mono-function	Mono-function
A B C H At Ht	A	B	C	H	L
1 timed changeover	1 timed changeover	1 timed changeover	1 timed changeover	1 timed changeover	1 timed changeover
8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡

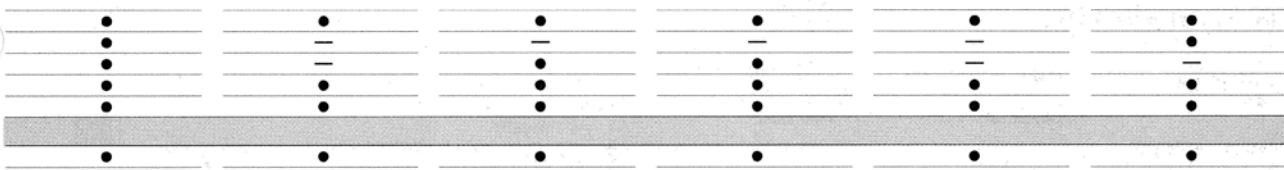

3

Connection **Dimensions** **Adaptor : 79 237 806**
to convert from DIN rail to screw mounting by 2x M4 screws



To order, specify :

Standard products, non stocked **1** Type **2** Part number **3** Accessory

Example : M2 U electronic timer - 88 881 006 - Panel adaptor 79 237 806

M2 DIN rail mounted electronic timers (22.5 mm)

Relay outputs

- Multi-function or mono-function
- Multi-range (8 ranges)
- Dual-voltage
- 1 changeover 8 A / 250 V
- Display of output states by 2 LEDs
- Wide choice of functions
- Front terminals

Characteristics

Accuracy

Repetition accuracy (with constant parameters)	± 0.5 %
Variation according to 0 • 40 °C	± 3 %
VDE 0435 -20 • 60 °C	± 5 %
Min. control pulse	0.02 s
Maximum reset time by de-energisation	0.100 s
Immunity from micro power cuts	<0.02 s
Minimum time on energisation	Ma - Mb - Mc K 1s 1s 1s 0.30s
Minimum time on de-energisation	Ma - Mb - Mc 0.2s 1s 1s

Output specification

Nominal current	Functions K - R	5 A ~ 1 A ~
	Other functions	8 A ~ 1 A ~
Nominal voltage		250 V ~
Rated power	Functions K - R	1250 VA - 30 W
	Other functions	2000 VA - 30 W
Maximum admissible current		15 A < 0.01 s
Minimum current		50 mA ~
Electrical life at I max 250 V ~ resistive (cycles)	Function K	10 ⁵
	Other functions	1.5 • 10 ⁵
Max. permitted number of operations per hour at I max 250 V ~ resistive		360
Mechanical life (operations)		2 x 10 ⁷

Function and use

Display of output state by LED	output in operation	Green LED
	power on	Red LED
Voltage variation		± 15 % Un 127 V -10% 240 V +10%
Maximum absorbed power		1.5 W / 24 V 5 VA / 110-127 V 10 VA / 220-240 V
Temperature limits	Use	-20 °C + 60 °C
	Stored	-30 °C + 70 °C
Insulation according to the standard VDE 0110 - IEC 255 Group C		250 V ~
Protection class according to UTE C 20010 - IEC 529 - DIN 40050		IP40
Conformity to standards IEC 255 VDE 0435-2021		•
Protection from voltage surge (in joules)		2
Connection: by terminal blocks with cable guide and front-access captive screws		•
Terminal capacity : multi or single wire 1 or 2 leads		2.5 mm ²
Mounting on symmetrical DIN rail 35 mm EN 50022		•
Weight (g)		110

Products currently being replaced by the TR range

Timing

Types

Part numbers (and voltages)

24 V ~ / 110 • 127 V 50 • 60Hz
24 V ~ / 220 • 240 V 50 • 60Hz
24 V ~ / 50 • 60Hz
110 • 127 V 50 • 60Hz
220 • 240 V 50 • 60Hz
24 • 240 V ~ 50 • 60Hz
N.B. : For 48 V ~ supply
Additional resistor : 560 Ω 2W / 24V ~

Functions

Relay output

Nominal current

Timing ranges (8 available options)

0.1 s to 1 s	0.4 min to 4 min	1 h to 10 h
1 s to 10 s	1 min to 10 min	6 h to 60 h
6 s to 60 s	6 min to 60 min	

Fixed pulse

Function diagrams

Terminal connections

- A1 - A2 : Supply
- A3 : Bridge (A2 - A3) for 24V supply
- 15 - 16 - 18 : Timed output contact
- B1 - B2 : Control contact
- 15 - 16 - 18 : Instantaneous contact 1
- B2 - B3 - A3 : Instantaneous contact 2
- Galvanic insulation Input-Output



Accessories

Panel adaptor

79 237 806

Function diagrams


Function D
Flip-flop



Function E
Flip-flop



Function K
Delay on de-energisation




Function O
Delayed safe-guard



Function R
Instantaneous relay




Function S
Star-delta




(1) • • 0.1s
• • 0.035s

3




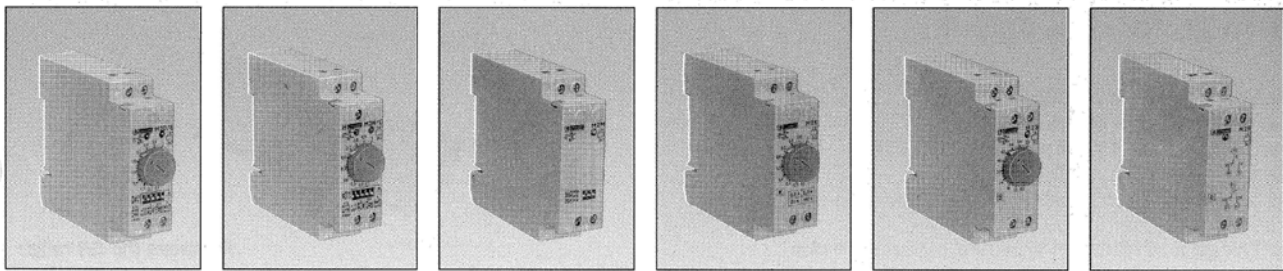


0.1 s • 60 h	0.1 s • 60 h	—	0.06 s • 160 s	3 s • 60 s	—
M2 D/E	M2 N/O	M2 M	M2 K	M2 S	M2 R
88 883 105	88 883 205	88 883 305	—	88 883 505	—
88 883 106	88 883 206	88 883 306	—	88 883 506	—
—	—	—	—	—	88 883 600
—	—	—	—	—	88 883 602
—	—	—	88 883 408	—	88 883 604
•	•	•	—	•	•
Multi-function with selection	Multi-function with selection	Multi-function with selection	Mono-function	Mono-function	Mono-function
D/E	N/O	Ma/Mb/Mc	K	S	R
1 changeover	1 changeover	1 changeover	1 changeover	1 changeover	2 changeover
8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~
•	•	—	0.06 s • 0.6 s 2 s • 20 s	0.25 s • 2.5 s 16 s • 160 s	3 s • 60 s
0.5 s ± 0.2					

1
2

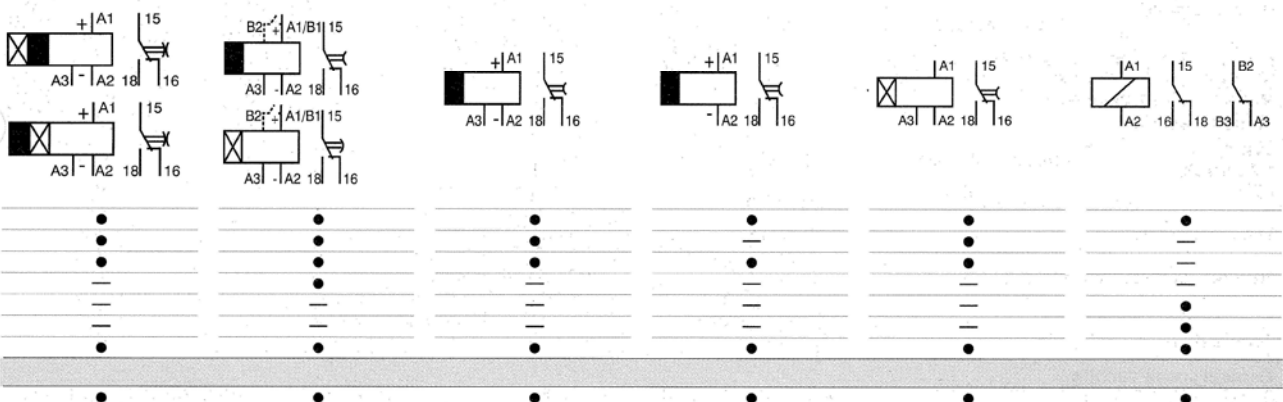

3

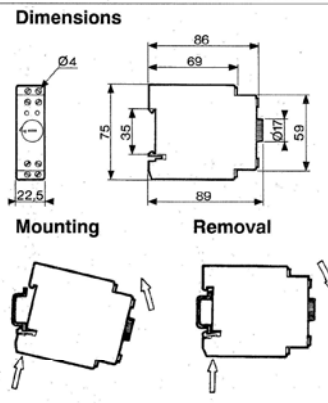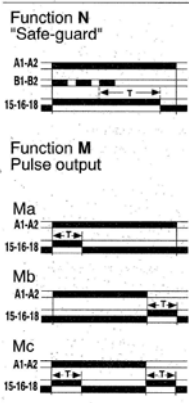

3

To order, specify :

Standard products, non stocked

1 Type 2 Part number 3 Accessory

Example : M2 D/E electronic timer - 88 883 105 - Panel adaptor 79 237 806