


Torcofix Adjustable Clicker Torque Wrenches

Torque range from 1 to 750 N.m


Adjustable general tools for Service and Repair. Ideal for covering a wide number of tasks as the operator can adjust them to deliver a broad range of torques. An audible click informs user that correct torque has been applied. Choice of sockets.

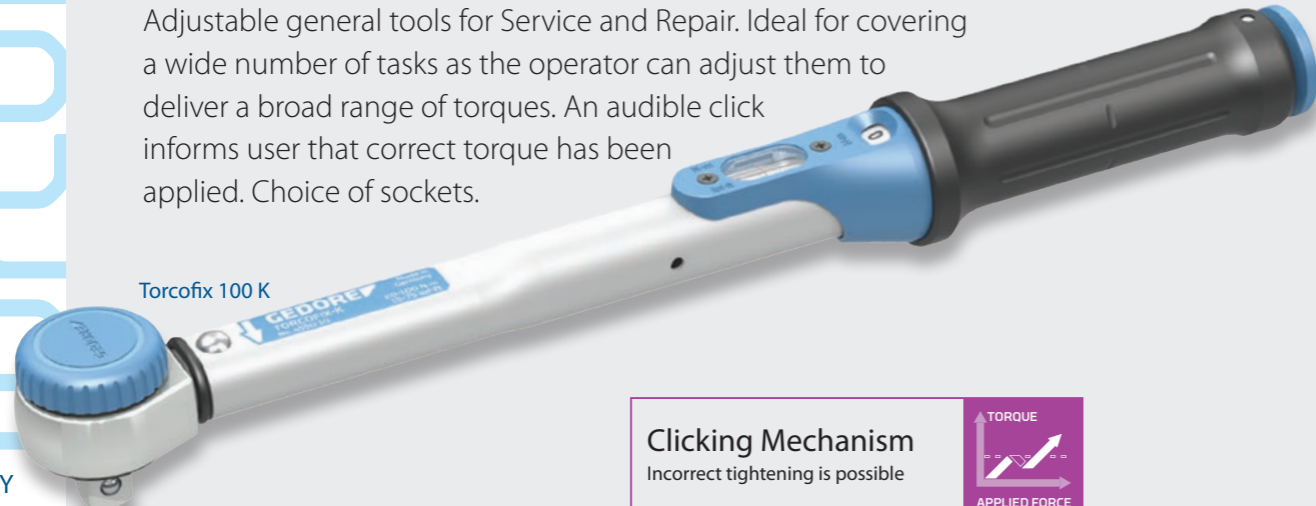

Torcofix 100 K

Clicking Mechanism

Incorrect tightening is possible



INDUSTRY SECTORS

Maintenance & Repair



Audible click provides accuracy and control. The risk of under and over tightening is reduced, as a click can be heard and felt when the preset torque is reached


Choice of Drives. Interchangeable 1/4" and 3/8" Square Drive Push Through 1/2" Square Drive

Efficient to use. Minimises the time to complete the task as these wrenches are quick and easy to adjust due to the clear scale design and simple to use locking mechanism

Long tool life. High quality, robust design and construction, further guaranteed by a two year warranty

Socket choice. See page 87

Versatility. Versatile tools ideal for Maintenance & Repair applications where a range of torques can be applied quickly and easily to a variety of fasteners and connectors

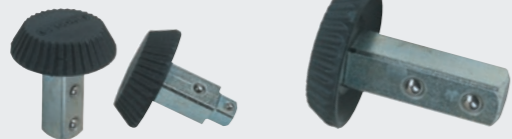

Interchangeable 1/4" and 3/8" Square Drive



Push Through 1/2" Square Drive

Order Code	Drive
024000	1/4"
024010	3/8"
024020	1/2"

Order Code	Model	Calibrated Range		Drive	k mm	kg	Accuracy	ISO 6789 Class	
		ISO	Imperial						
2201429	Torcofix 5 K	1-5 N.m	0.25 N.m	0.75-3.7 lbf.ft	1/4"	224	0.32	+/- 4%	2A
1545132	Torcofix 25 K	5-25 N.m	1 N.m	3.7-18 lbf.ft	1/4"	285	0.45	+/- 4%	2A
1545140	Torcofix 50 K	10-50 N.m	2.5 N.m	7.5-37 lbf.ft	3/8"	335	0.54	+/- 4%	2A
7601530	Torcofix 100 K	20-100 N.m	5 N.m	15-75 lbf.ft	1/2"	394	0.90	+/- 4%	2A
7601610	Torcofix 200 K	40-200 N.m	10 N.m	30-150 lbf.ft	1/2"	485	1.10	+/- 4%	2A
7601880	Torcofix 300 K	60-300 N.m	10 N.m	45-220 lbf.ft	1/2"	577	1.40	+/- 4%	2A
7674330	Torcofix 400 K	80-400 N.m	10 N.m	60-300 lbf.ft	3/4"	686	2.00	+/- 4%	2A
7674760	Torcofix 550 K	110-550 N.m	10 N.m	80-405 lbf.ft	3/4"	957	3.80	+/- 4%	2A
1521365	Torcofix 750 K	150-750 N.m	10 N.m	110-550 lbf.ft	3/4"	1236	4.80	+/- 4%	2A

Torcofix Adjustable Clicker Torque Wrenches

Torque range from 5 to 400 N.m

Adjustable general tools for Service and Repair. Ideal for covering a wide number of tasks as the operator can adjust them to deliver a broad range of torques.


An audible click informs user that correct torque has been applied. Multiple applications via range of end fittings and ratchets.



Torcofix 100 Z

Clicking Mechanism

Incorrect tightening is possible



INDUSTRY SECTORS

Maintenance & Repair



Audible click provides accuracy and control. The risk of under and over tightening is reduced, as a click can be heard and felt when the preset torque is reached

Efficient to use. Minimises the time to complete the task as these wrenches are quick and easy to adjust due to the clear scale design and simple to use locking mechanism

Long tool life. High quality, robust design and construction, further guaranteed by a two year warranty

End Fittings. The design allows the use of a range of 16mm spigot, 9x12 end fittings and ratchets for multiple industrial applications. **See pages 84-86**

Versatility. Versatile tools ideal for Maintenance & Repair applications where a range of torques can be applied quickly and easily to a variety of fasteners and connectors

For more information: Tool Selector; gedore-torque.com/tool-selector Telephone; +44 (0) 1483 894 476
Videos; www.youtube.com/gedore-torque Email; salesandrepairs@gedore-torque.com

Want to know how to use this tool?



Watch our video

Order Code	Model	Calibrated Range		Drive	k mm	kg	Accuracy	ISO 6789 Class	
		ISO	Imperial						
1646168	Torcofix 25 Z	5-25 N.m	1 N.m	3.7-18 lbf.ft	16	280	0.50	+/- 4%	2A
1646176	Torcofix 50 Z	10-50 N.m	2.5 N.m	7.5-37 lbf.ft	16	330	0.60	+/- 4%	2A
7097270	Torcofix 100 Z	20-100 N.m	5 N.m	15-75 lbf.ft	16	375	0.60	+/- 4%	2A
7097350	Torcofix 200 Z	40-200 N.m	10 N.m	30-150 lbf.ft	16	465	0.80	+/- 4%	2A
7097430	Torcofix 300 Z	60-300 N.m	10 N.m	45-220 lbf.ft	16	565	1.20	+/- 4%	2A
7094090	Torcofix 400 Z	80-400 N.m	10 N.m	60-300 lbf.ft	16	650	1.50	+/- 4%	2A
1646192	Torcofix 25 SE	5-25 N.m	1 N.m	3.7-18 lbf.ft	9x12	280	0.50	+/- 4%	2A
1646206	Torcofix 50 SE	10-50 N.m	2.5 N.m	7.5-37 lbf.ft	9x12	330	0.60	+/- 4%	2A
7600210	Torcofix 100 SE	20-100 N.m	5 N.m	15-75 lbf.ft	9x12	375	0.60	+/- 4%	2A
7600990	Torcofix 200 SE	40-200 N.m	10 N.m	30-150 lbf.ft	14x18	465	0.80	+/- 4%	2A
7601020	Torcofix 300 SE	60-300 N.m	10 N.m	45-220 lbf.ft	14x18	565	1.20	+/- 4%	2A
7604120	Torcofix 400 SE	80-400 N.m	10 N.m	60-300 lbf.ft	14x18	650	1.50	+/- 4%	2A