REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/15/18	PS

460±50

155±5

'A'

GREEN

GLOBTEK

BLACK   WHITE

'B'
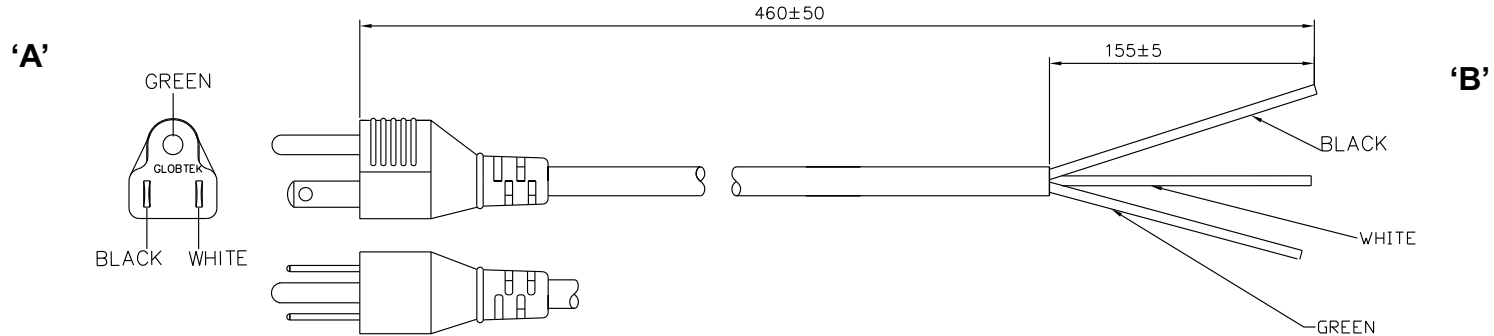
BLACK

WHITE

GREEN

GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC
CABLE TYPE / SIZE: SVT, # 18 AWG, 3 CONDUCTOR
TEMPERATURE RATING: 60° C MIN.
CONDUCTOR COLORS: BLACK/ WHITE/ GREEN
CABLE JACKET COLOR: BLACK
OVERALL LENGTH (L):   460 ± 50 mm
CABLE OUTER DIAMETER: 6.3 ± 0.15 mm
END 'A' PLUG: NEMA 5-15P
END 'B' :   SEE TERMINATION TABLE
APPROVALS PLUG: UL, CSA   OR CUL
APPROVALS CABLE: UL, CSA   OR CUL

PACKING:

BULK PACKED, BUNDLES OF 25.

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH
   APPROVAL SYMBOLS OR FILE NUMBER(S).

UL   SA   OR   cULus

CONDUCTOR TERMINATION TABLE:

Wire	Color	ROJ± 5 mm	RIJ+1mm	Terminal
NEUTRAL	WHT	155	-	STRIPPED
LINE	BLK	155	-	STRIPPED
GROUND	GREEN	155	-	STRIPPED

RELEASED
By N.Frost at 8:11 am, Sep 18, 2018

Complies with Restriction of Hazardous Substances
RoHS

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
			TABULATION BLOCK	

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000   Fax 201.784.0111

TOLERANCES:
DECIMALS   ANGULAR
.xx +/- 0.1   +/- 1°
.xxx +/- .005

MILLIMETERS   ANGULAR
.xx +/- 0.3   +/- 1°
.xxx +/- .013

INIT.BY: BS	DATE: 09/15/18		DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET	
DRAWN: NF	DATE: 09/15/18	FSCN No.: G, CC	SIZE A	REV. A
APRVD: DMR	DATE: 09/15/18	SCALE: NONE	PART NO: 3021451F6CCC(R)	SHEET 1/1