

Micro Commercial Components



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

10A01 THRU 10A07

Features

- Lead Free Finish/Rohs Compliant (Note1) ("P"Suffix designates Compliant. See ordering information)
- Halogen free available upon request by adding suffix "-HF"
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 400A Peak
- Low Reverse Leakage Current and Diffused Junction
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C


MCC	Device	Maximum	Maximum	Maximum
Catalog	Marking	Reccurrent	RMS	DC
Number		Peak Reverse	Voltage	Blocking
		Voltage		Voltage
10A01	10A01	50V	35V	50V
10A02	10A02	100V	70V	100V
10A03	10A03	200V	140V	200V
10A04	10A04	400V	280V	400V
10A05	10A05	600V	420V	600V
10A06	10A06	800V	560V	800V
10A07	10A07	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

100111041 01141 40101 101100 0 20 0 011101 W100 0 0 001110					
Average Forward Current	I _{F(AV)}	10 A	$T_A = 50^{\circ}C$		
Peak Forward Surge	I _{FSM}	400A	8.3ms, half sine		
Current					
Maximum			$I_{FM} = 10A;$		
Instantaneous	V_{F}	1.0V	T _A = 25°C		
Forward Voltage					
Maximum DC					
Reverse Current At	I_R	10μΑ	T _A = 25°C		
Rated DC Blocking		100μΑ	$T_A = 100C$		
Voltage		•			
Typical Junction					
Capacitance			Measured at		
·	C _J	150pF	1.0MHz, V _R =4.0V		
			1.01VII 12, V _R =4.0V		
Typical Thermal Resistance Junction to Ambien	R_{thJA}	10K/W			


Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.


10 Amp Rectifier 50 to 1000 Volts

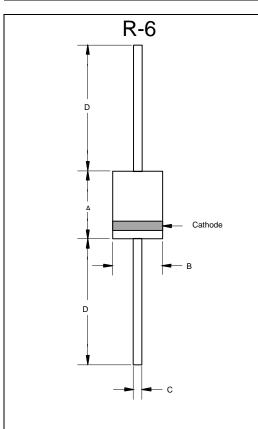


DIMENSIONS							
	INCHES		MM				
DIM	MIN	MAX	MIN	MAX	NOTE		
Α	.340	.360	8.60	9.10			
В	.340	.360	8.60	9.10			
С	.048	.052	1.20	1.30			
D	1.000		25.40				


Micro Commercial Components

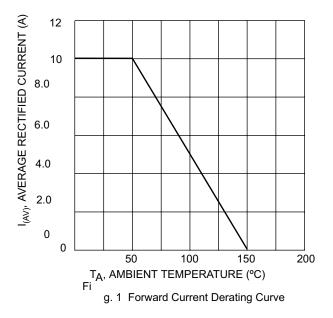

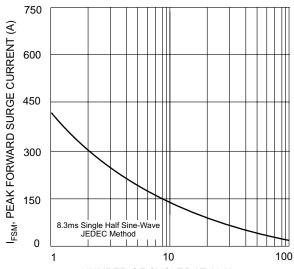

NUMBER OF CYCLES AT 60 Hz Fig. 3 Maximum Non-Repetitive Peak Forward Surge Current

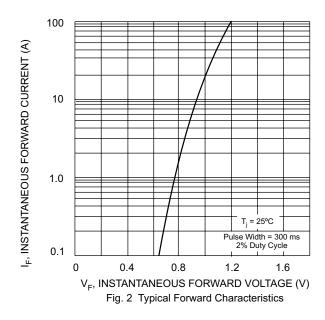

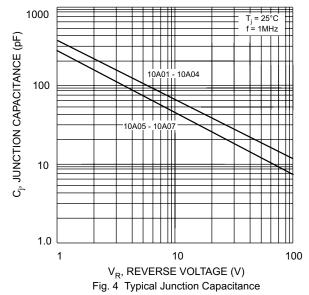



Ordering Information:

Device	Packing
Part Number-TP	Tape&Reel: 500pcs/Reel
Part Number-AP	Ammo Packing: 450pcs/Ammo Box
Part Number-BP	Bulk: 4.8Kpcs/Carton

Note: Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* . and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.