

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1731620334](#)
Status: **Active**
Overview: [Nano-Pitch I/O Interconnect System](#)
Description: Nano-Pitch I/O Receptacle, Straight, Through Hole, with Cap, 80 Circuits

Documents:

3D Model	Application Specification AS-173162-0001-001 (PDF)
3D Model (PDF)	Packaging Specification PK-173307-0001-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-173162-0001-001 (PDF)	

Agency Certification

UL E29179


General

Product Family	I/O Connectors
Series	173162
Application	Wire-to-Board
Component Type	Receptacle
Overview	Nano-Pitch I/O Interconnect System
Product Name	Nano-Pitch I/O
Type	N/A
UPC	889056641555

Physical

Circuits (Loaded)	80
Circuits (maximum)	80
Color - Resin	Black
Durability (mating cycles max)	250
Flammability	94V-0
Gender	Receptacle
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.271/g
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Pitch - Mating Interface	0.50mm
Pitch - Termination Interface	0.50mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Temperature Range - Operating	-40° to +80°C
Termination Interface: Style	Through Hole
Waterproof / Dustproof	No

Electrical

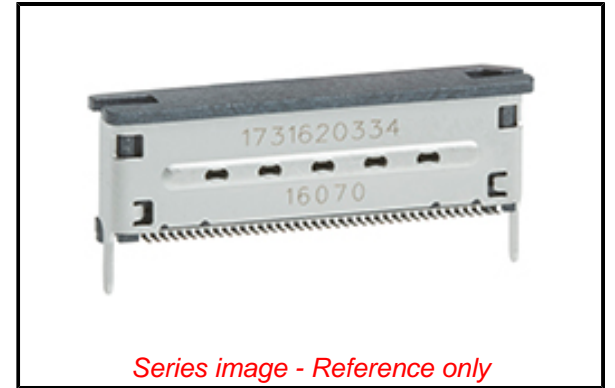

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ECHA_01_2020 (16
January 2020

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[173162 Series](#)

Mates With

Nano-Pitch I/O Cable Assembly [205058](#)

Current - Maximum per Contact	0.5A
Grounding to Panel	None
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-173162-0001-001
Electrical Model Document	EE-173162-0010
Packaging Specification	PK-173307-0001-001
Product Specification	PS-173162-0001-001
S-Parameter Model	SP-173162-0010
Sales Drawing	SD-173162-0002-001

This document was generated on 05/19/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION