

## PLS-080B-3VAL



## PLS-080B-3VAL

Stainless Steel Level Sensor

### Electrical Characteristics @ 25 °C

Contact form		B
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	140
Switching current max.	A	1
Carry current max.	A	1.2
Breakdown voltage min.	VDC	240
Total resistance max.	mΩ	180

### Environmental Characteristics


Operating temperature	°C	-40 to +125
Storage temperature	°C	-40 to +125

### Mechanical Characteristics

Density of float typ.*	g / cm <sup>3</sup>	0.7
Recommended minimum gravity of medium	g / cm <sup>3</sup>	Density of float + 20%

\* in delivery condition

### Dimensions in mm

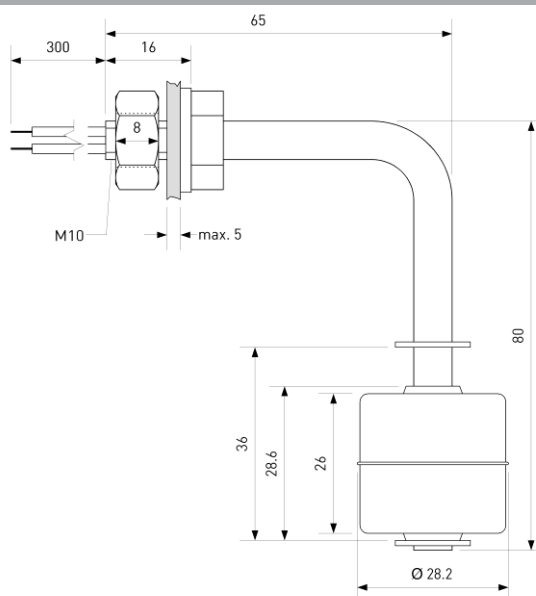

### Features

- Stainless Steel housing
- Rugged and durable
- Suitable for food contact
- Extended temperature range
- Customized types available

### Approvals

RoHS

REACH

IP 67

CE US

### Ordering Information

Packing Unit	5	pcs
Weight per piece	54	g
Weight per package	278	g

PLS-080B-3VAL




**PLS-080B-3VAL**

Stainless Steel Level Sensor

Material Information

	Material	Colour
Housing	Stainless Steel 304, mechanically polished	
Cable	UL 1332, AWG 24, 4 mm stripped and tinned	black
Nuts	Stainless Steel 304, M10, 1 pc preassembled	
Float	Stainless Steel 304, mechanically polished	
Potting	PU / Epoxy	black
Sealing ring	Silicone	white

Operation View




Remarks

When mounted near ferromagnetic parts switching distance of PLS-080B-3VAL may vary.

Electromagnetical influences and magnetic fields may change the switching behaviour of the Level Sensor.

Mounting

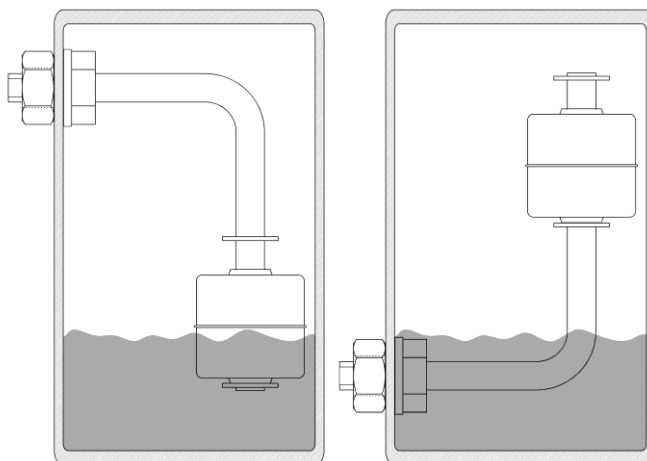

When mounted stem up, operating functions are reversed.