

## 2A, 200V-1000V Surface Mount Rectifier

### FEATURES

- Glass passivated junction chip
- Ideal for automated placement
- Low reverse leakage
- Moisture sensitivity level: level 1, per J-STD-020
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Switch Mode Power Supply
- Inverters and Converters
- Free Wheeling diodes

### MECHANICAL DATA

- Case: DO-214AC (SMA)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1 whisker test
- Polarity: Indicated by cathode band
- Weight: 0.06 g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	2	A
$V_{RRM}$	200-1000	V
$I_{FSM}$	50	A
$T_{JMAX}$	150	°C
Package	DO-214AC (SMA)	



DO-214AC (SMA)



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)								
PARAMETER	SYMBOL	S2DA-T	S2GA-T	S2JA-T	S2KA-T	S2MA-T	UNIT	
Marking code on the device		S2DA	S2GA	S2JA	S2KA	S2MA	V	
Repetitive peak reverse voltage	$V_{RRM}$	200	400	600	800	1000	V	
Reverse voltage, total rms value	$V_{R(RMS)}$	140	280	420	560	700	V	
DC blocking voltage	$V_{DC}$	200	400	600	800	1000	V	
Forward current	$I_F$	2					A	
Surge peak forward current single half sine-wave superimposed on rated load per diode	8.3 ms at $T_A = 25^\circ\text{C}$	$I_{FSM}$					50	A
	1.0 ms at $T_A = 25^\circ\text{C}$						124	A
Junction temperature	$T_J$	-55 to +150					°C	
Storage temperature	$T_{STG}$	-55 to +150					°C	

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>UNIT</b>
Junction-to-lead thermal resistance per diode	$R_{\theta JL}$	14	°C/W
Junction-to-ambient thermal resistance per diode	$R_{\theta JA}$	86	°C/W
Junction-to-case thermal resistance per diode	$R_{\theta JC}$	23	°C/W

**Thermal Performance Note:** Units mounted on PCB (5mm x 5mm Cu pad test board)

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)					
<b>PARAMETER</b>	<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Forward voltage per diode <sup>(1)</sup>	$I_F = 1\text{A}, T_J = 25^\circ\text{C}$	$V_F$	0.90	-	V
	$I_F = 2\text{A}, T_J = 25^\circ\text{C}$		0.96	1.1	V
	$I_F = 1\text{A}, T_J = 125^\circ\text{C}$		0.79	-	V
	$I_F = 2\text{A}, T_J = 125^\circ\text{C}$		0.86	0.97	V
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	$T_J = 25^\circ\text{C}$	$I_R$	-	5	$\mu\text{A}$
	$T_J = 125^\circ\text{C}$		-	100	$\mu\text{A}$
Junction capacitance per diode	1 MHz, $V_R = 4.0\text{V}$	$C_J$	30	-	pF

**Notes:**

- (1) Pulse test with  $PW = 0.3\text{ ms}$
- (2) Pulse test with  $PW = 30\text{ ms}$

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b>	<b>PACKAGE</b>	<b>PACKING</b>
S2XA-T R3G <sup>(1)</sup>	SMA	1,800 / 7" Plastic reel
S2XA-T M2G <sup>(1)</sup>	SMA	7,500 / 13" Plastic reel
S2XA-T R2G <sup>(1)</sup>	SMA	7,500 / 13" Paper reel


**Notes:**

- (1) "X" defines voltage from 200V(S2DA-T) to 1000V(S2MA-T)


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

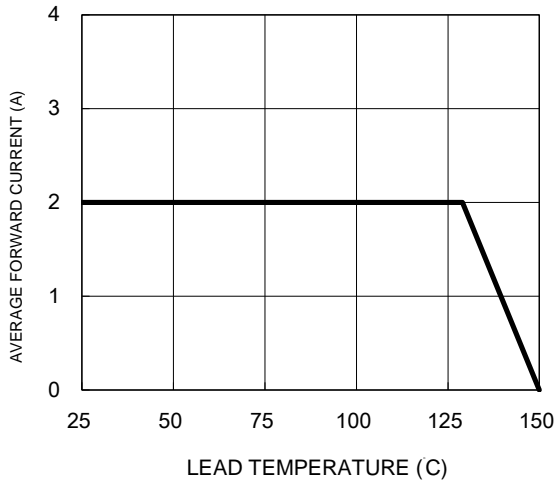


**Fig.2 Typical Junction Capacitance**

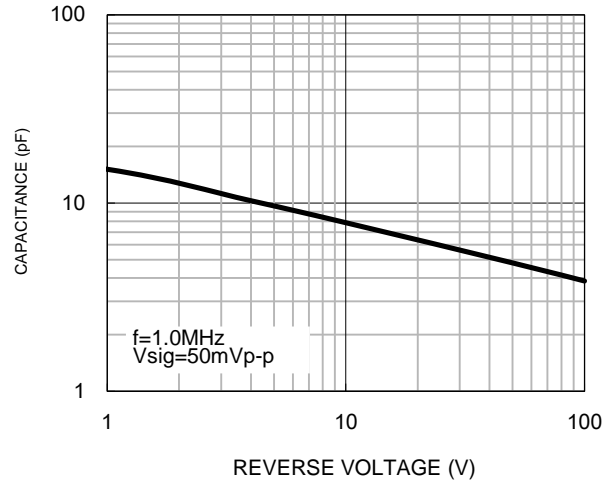


**Fig.3 Typical Reverse Characteristics**

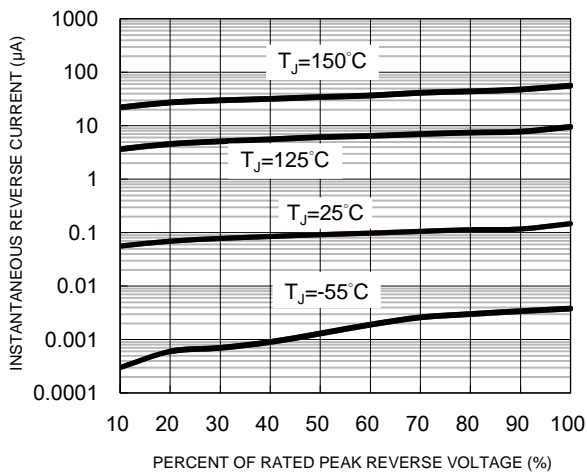

**Fig.4 Typical Forward Characteristics**

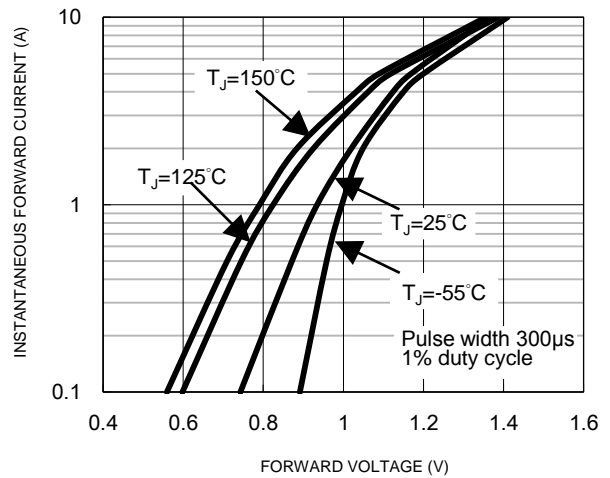


**Fig.5 Typical Transient Thermal Impedance**

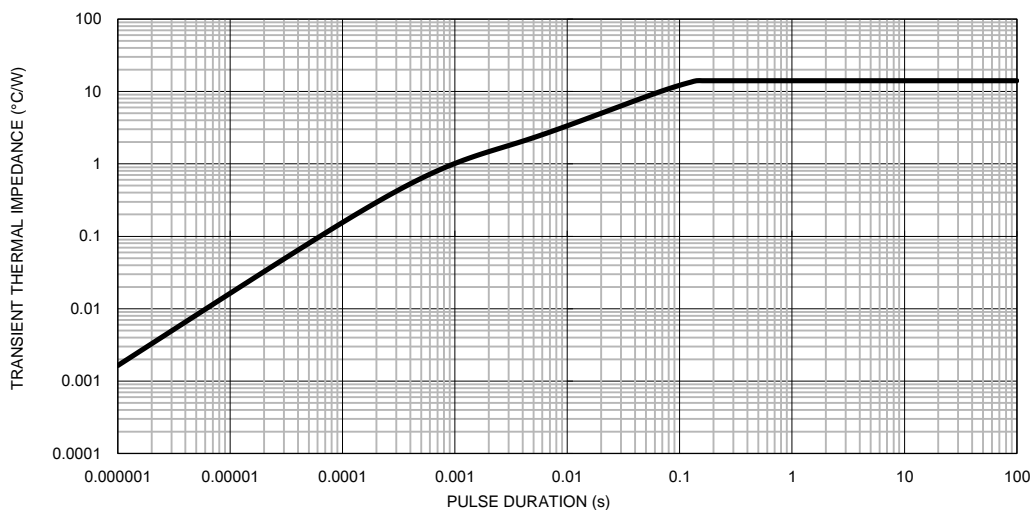


**PACKAGE OUTLINE DIMENSIONS**

DO-214AC (SMA)

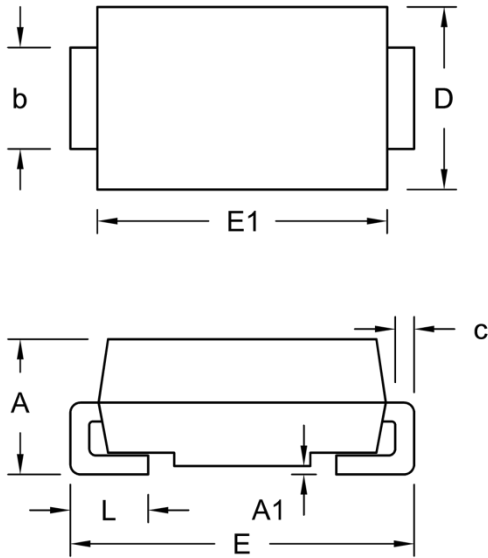

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	1.70	2.30	0.067	0.091
A1	0.05	0.20	0.002	0.008
b	1.20	1.80	0.047	0.071
c	0.15	0.41	0.006	0.016
D	2.40	3.00	0.094	0.118
E	4.80	5.40	0.189	0.213
E1	4.00	4.60	0.157	0.181
L	0.75	1.60	0.030	0.063

**SUGGESTED PAD LAYOUT**

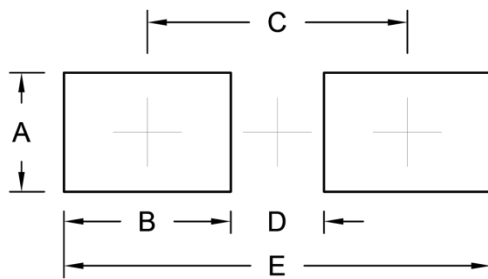

Symbol	Unit (mm)	Unit (inch)
A	1.82	0.072
B	2.56	0.101
C	3.99	0.157
D	1.43	0.056
E	6.55	0.258

**MARKING DIAGRAM**



- P/N = Marking Code
- G = Green Compound
- YW = Date Code
- F = Factory Code

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.