



- A computer with a DisplayPort v1.2 compatible Graphics Card (e.g. AMD Radeon with AMD Eyefinity technology) is required to display in video wall mode. Backward compatible with most DisplayPort 1.1a equipment running current graphics drivers, with the feature set being limited to that of your equipment (e.g. you may be limited to displaying in Clone / Mirror mode only). Compatibility with older graphics cards is not guaranteed.
- MST-compliant DisplayPort 1.2 graphics cards are limited to a bandwidth of 21.6 Gbps amongst all monitors with higher resolution monitors using up more bandwidth. 1080p monitors will use up approximately 22% of bandwidth, whereas 4K monitors will use 40% or more. As each monitor will be different, it is necessary to verify the percentage of bandwidth being used by each monitor in the display settings interface of your graphics card. If the total percentage of bandwidth taken up by all the connected monitors exceeds 100%, an image will not display on one or more of them.
- Maximum supported video resolutions and number of monitors will be dependent upon your graphics card. Check the specifications of your graphics card to determine its capabilities.

## 4-Port DisplayPort 1.2 to HDMI Multi-Stream Transport (MST) Hub, 4K UHD, TAA

MODEL NUMBER: **B156-004-HD**

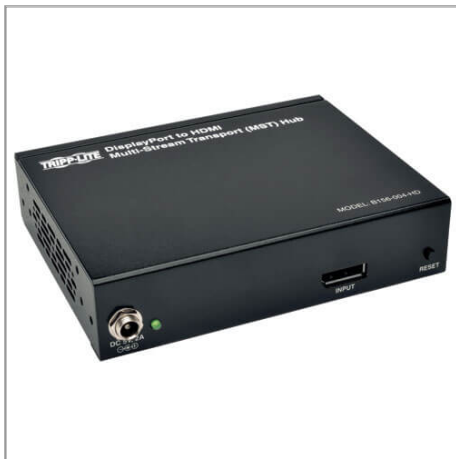

Ideal for digital signage in schools, airports and other venues that require a DisplayPort signal to be distributed to four HDMI monitors in mirror mode, extended mode, or video wall mode.

### Description

Tripp Lite's B156-004-HD 4-Port DisplayPort 1.2 to HDMI MST Hub allows you to connect four independent HDMI monitors to a single DisplayPort output on your computer. Connect to a Mini DisplayPort output, or the Thunderbolt port on your Mac, using a Mini DisplayPort to DisplayPort cable (Tripp Lite P583-Series). You can display the same image on each monitor, extend the desktop across them, or display in video wall mode where monitors are combined to display as one, enlarged monitor. The B156-004-HD supports video resolutions up to 1920 x 1080 (1080p) on each connected monitor. Expanded video resolutions are supported when displaying all four monitors in video wall mode, such as 3840 x 2160 @ 24/30Hz in a 2X2 monitor configuration, or 7680 x 1080 in a vertical 4X1 monitor

### Highlights

- DisplayPort 1.2 compliant
- Display the same image on each monitor, extend the desktop across them, or display in video wall mode where monitors are combined to display as one
- Supports video resolutions up to 1920 x 1080 on each monitor. Displaying all four monitors in video wall mode allows for expanded resolutions up to 3840 x 2160 @ 24/30Hz 4K UHD.
- Supports up to 48-bit Deep Color (16 bits per channel)
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

### System Requirements

- A computer with a DisplayPort v1.2 compatible Graphics Card (e.g. AMD Radeon with AMD Eyefinity technology) is required to display in video wall mode.
- Mac OS X does not support MST for NVIDIA and Intel Graphics Processor Units, limiting video display on the connected monitors to mirror mode.
- Backward compatible with most DisplayPort 1.1a equipment running current graphics drivers, with the feature set being limited to that of your equipment (e.g. you may be limited to displaying



configuration. It supports 48-bit Deep Color (16 bits per channel), DTS-HD, Dolby True HD and 7.1 channel surround sound audio, and is compatible with HDCP, EDID and DDC. It comes with an external power supply and brackets for wall-, rack- or pole-mounting. Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases.

## Features

### Splitting, Extending, Video Wall Mode

- Connect four independent HDMI monitors to a single DisplayPort output on your computer
- Display the same image on each monitor, extend the desktop across them, or display in video wall mode where monitors are combined to display as one, enlarged monitor
- Supports video resolutions up to 1920 x 1080 (1080p) on each connected monitor.
- Expanded video resolutions are supported when displaying all four monitors in video wall mode, such as 3840 x 2160 @ 24/30Hz in a 2X2 monitor configuration, or 7680 x 1080 in a vertical 4X1 monitor configuration.

### Video Standards and Protocols

- Supports up to 48-bit Deep Color (16 bits per channel)
- Compatible with HDCP, EDID and DDC
- DisplayPort 1.2 compliant
- Compatible with Apple® Thunderbolt connectors when using a Mini DisplayPort to DisplayPort cable (Tripp Lite P583-Series)

### Installation

- Plug-and-play; no software or drivers required
- Easy to install; connect the DisplayPort video source to the hub's input port, connect the external power supply and finally connect the four HDMI monitors to the output ports
- Connect to a Mini DisplayPort output, or the Thunderbolt port on your Mac, using a Mini DisplayPort to DisplayPort cable (Tripp Lite P583-Series)

### Mounting Options

- Wall-, rack- or pole-mounting; mounting hardware is included

### TAA-Compliant for GSA Schedule Purchases

- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

in Clone / Mirror Mode only).  
Compatibility with older graphics cards is not guaranteed.

- MST-compliant graphics cards are limited to a bandwidth of 21.6 Gbps amongst all monitors with higher resolution monitors using up more bandwidth. 1080p monitors will use up approximately 22% of bandwidth, whereas 4K monitors will use 40% or more. As each monitor will be different, it is necessary to verify the percentage of bandwidth being used by each monitor in the display settings interface of your graphics card. If the total percentage of bandwidth taken up by all the connected monitors exceeds 100%, an image will not display on one or more of them.
- A monitor with a HDMI port.

### Package Includes

- B156-004-HD DisplayPort 1.2 to HDMI Multi-Stream Transport (MST) Hub
- Mounting Hardware
- External Power Supply with NEMA 1-15P Plug (Input: 100-240V, 50/60Hz, 0.5A; Output: 5V, 2A, 5 ft.)

## Specifications

### OVERVIEW



UPC Code	037332186928
AC Adapter	Input: 100-240V, 50/60Hz, 0.5A; Output: 5V, 2A, 5 ft.
<b>INPUT</b>	
External Power Supply Input Specs (V / Hz / A)	100-240V, 50/60Hz, 0.5A
External Power Supply Output Specs (V / A)	5V / 2A
External Power Supply Cord Length (ft.)	4.5
External Power Supply DC Barrel Connector Specs	OD: 5.5 x 2.1 x 7.5mm, Positive Pin, Negative Sleeve
External Power Supply Plug(s)	NEMA 1-15P North America
External Power Supply Certifications	FCC; UL; cUL
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
LED Indicators	(x1) Green (Power)
<b>PHYSICAL</b>	
Color	Black
Material of Construction	SECC
Rackmountable	Yes
Shipping Dimensions (hwd / cm)	21.41 x 16.41 x 5.59
Shipping Dimensions (hwd / in.)	8.43 x 6.46 x 2.20
Shipping Weight (kg)	0.29
Shipping Weight (lbs.)	0.65
Unit Dimensions (hwd / cm)	12.8 x 10 x 2.97
Unit Dimensions (hwd / in.)	5.04 x 3.93 x 1.17
Unit Packaging Type	Box
Unit Weight (kg)	0.25
Unit Weight (lbs.)	0.56
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	14 to 167 F (-10 to 75 C)
Storage Temperature Range	-4 to 176 F (-20 to 80 C)
Relative Humidity	0% to 85%, Non-Condensing
BTUs	23.9 BTU/Hr
Power Consumption (Watts)	7W



<b>CONNECTIONS</b>	
Ports	4
Side A - Connector 1	DISPLAYPORT (FEMALE)
Side B - Connector 1	(4) HDMI (FEMALE)
Connector Plating	Nickel
Contact Plating	Gold
<b>FEATURES &amp; SPECIFICATIONS</b>	
Max Supported Video Resolution	3840 x 2160 (4K x 2K) @ 60Hz
Displayport Specification	1.2
HDMI Specification	1.4
Audio Specification	DTS-HD, Dolby TrueHD and 7.1-channel surround sound audio
Driver Required	No
Max Supported Color Depth	48-bit Deep Color
Technology	DisplayPort; HDMI
<b>STANDARDS &amp; COMPLIANCE</b>	
Approvals	FCC, RoHS, and REACH
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	3-year limited warranty

© 2020 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>